




Verricello BB 610 Winch

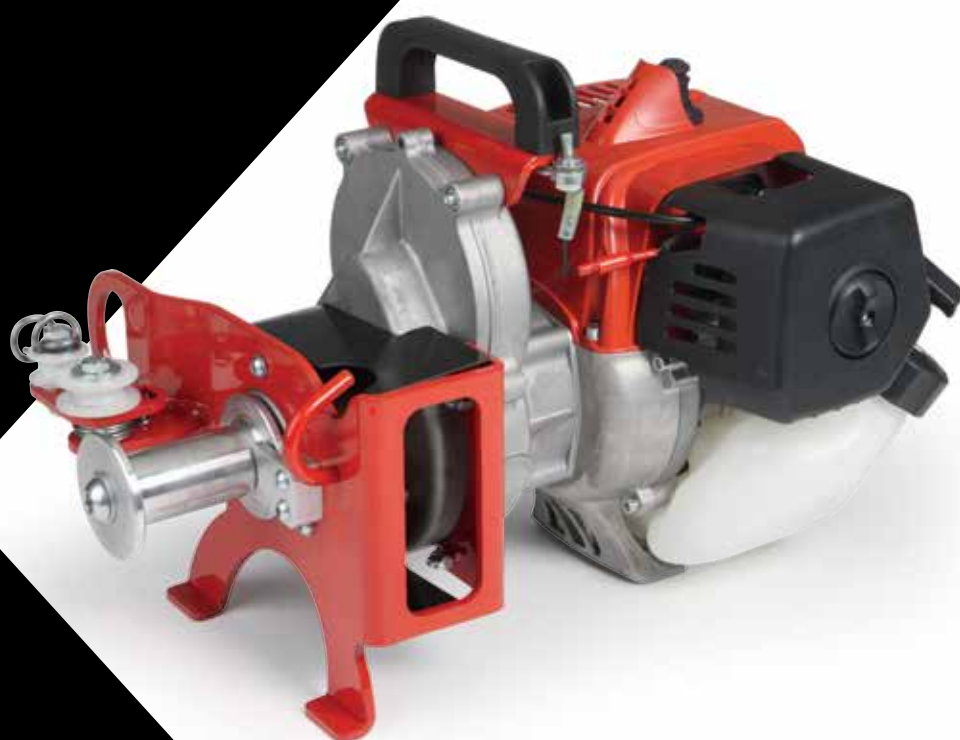

Motore Blue Bird N61E a 2 tempi 57,9 c.c.
Potenza 2.0 kW (2,7 Hp) a 7000 rpm
Acceleratore semiautomatico
Consumo 630 gr/kWh a 7000 rpm
Capacità del serbatoio 0,9 L

Fune consigliata: in poliestere Ø 10 mm (non fornita)
Avvolgimento base tamburo (n° giri) 6
Velocità d'avvolgimento 25 mt/min
Tiro diretto 600 Kg
Tiro con rinvio 1200 Kg
Freno automatico
Ingombro: 430 x 315 x 300 mm
Peso senza fune 10,5 Kg

Blue Bird 2-stroke engine N61E - 57,9 c.c.
Power 2.0 kW (2,7 Hp) at 7000 rpm
Semi-automatic accelerator
Fuel consumption: 630 gr/kWh at 7000 rpm
Tank capacity 0,9 L

Suggested rope: polyester Ø 10 mm (not included)
Drum winding capacity: 6 loops
Winding speed 25 mt/min
Direct pulling 600 Kg
Pulling with support pulley 1200 Kg
Automatic brake
Dimensions: 430 x 315 x 300 mm
Weight without rope 10,5 Kg

Blue Bird
Industries

Via Due Camini, 19 • 36010 Zanè • VI • Italy
 Tel +39 0445 314138 • Fax +39 0445 314225
 www.bluebirdind.com • info@bluebirdind.com



Verricello BB 1610X Winch



Motore Blue Bird N61E 57,9 c.c.
Potenza 2.0 kW (2,7 Hp) a 7000 rpm
Consumo 630 gr/kWh a 7000 rpm
Capacità del serbatoio 0,9 L

Capacità tamburo 80 mt con fune Ø 5 mm (inclusa)
Avvolgimento automatico con guida fune
Velocità d'avvolgimento 28 mt/min
Tiro diretto 1300 Kg
Tiro con rinvio 2600 Kg
Freno automatico
Ingombro: 550 x 420 x 350 mm
Peso senza fune 25,3 Kg

Blue Bird 2-stroke engine N61E - 57,9 c.c.
Power 2.0 kW (2,7 Hp) at 7000 rpm
Fuel consumption: 630 gr/kWh at 7000 rpm
Tank capacity 0,9 L

Drum capacity: 80 mt with rope Ø 5 mm (included)
Automatic winding with rope guide
Winding speed 28 mt/min
Direct pulling 1300 Kg
Pulling with support pulley 2600 Kg
Automatic brake
Dimensions: 550 x 420 x 350 mm
Weight without rope 25,3 Kg

Blue Bird
Industries

Via Due Camini, 19 • 36010 Zanè • VI • Italy
 Tel +39 0445 314138 • Fax +39 0445 314225
www.bluebirdind.com • info@bluebirdind.com